

Hanky Golf Ball Pad Printer

HANKY
台灣恒基

Features:

- Economy price, suitable for sample order.
- Intuitive operation, maintenance easier.
- Easy disassembly, assembly and cleaning.
- Using an adjustable of the plate base, Steel plate can be independently micro-adjust front/back, left/right and different angle.
- Printing precision +/-0.05mm





◀ HA-640TACI
HA-660TACI ▶



Specifications	4-color pad printer with carousel		6-color pad printer with carousel	
Model	HA-640TACI	HA-640PC	HA-660TACI	HA-660PC
System	Open Tray	Ink Cup	Open Tray	Ink Cup
Max. Printing Area	80 * 80	dia. 50	80 * 80	dia. 50
Ink Cup Size	/	dia. 60	/	dia. 60
Plate Size	100 * 100	100 * 250	100 * 100	100 * 250
Max. Speed	800 ~1200 pph		800 ~1200 pph	
Machine Weight	300 kgs		350 kgs	
Machine Meas	1130 * 1240 * 1570		1130 * 1240 * 1570	
Voltage(1 phase/50-60 Hz)	110V / 220V		110V / 220V	

(mm)

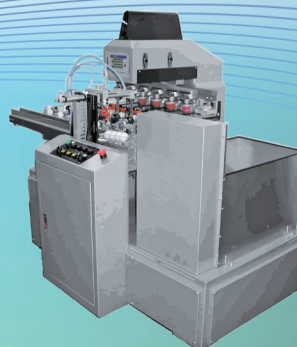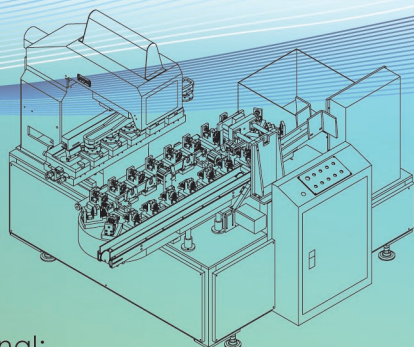


Optional:


- Feeding ball system and unloading system.
- Install hot air dryer for each printing head, makes quick dry before print next color.
- Adjustable 90, 180, or 360 degree turning device.

Features:

- Single infeeding & single outfeeding for 5 ~ 10 colors printing or double infeeding & Double outfeeding for 5 ~ 7 colors printing (Customer made).
- Printing speed: 2,500 ~ 3,500 Pcs/Hr.
- Printing plate and Tampon Pad move by CAM, printing speed stable and consistency.
- Printing precision +/-0.025mm
- The sealed ink cup system makes stable and precise printing.
- Install hot air dryer for each printing head, makes quick dry before print next color.
- Adjustable 90, 180, or 360 degree turning device.
- Digitally controlled touch panel for a variety of printing requirements.
- With Tampon Pad cleaning system.
- High Capacity Hopper 2,500pcs.
- Unloading conveyor system match Index table turning speed.
- Safety Guard protection device in compliance to European CE requirements.
- Optional: UV system or hot air conveyor.

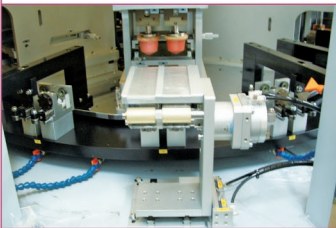

Double print

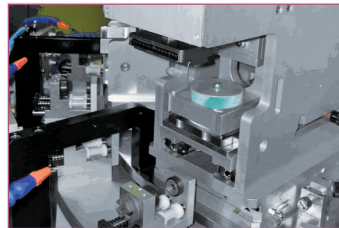

Single Print

(mm)

Model	GF-1006	GF-1008	GF-1010	GF-2005UV	GF-2006UV	GF-2007UV
Loading/Unloading System	Single / Single			Double / Double		
Colors Available	6 Colors	8 Colors	10 Colors	5 Colors	6 Colors	7 Colors
Ink Cup Size	Ø60			Ø90		
Max. Printing Area	Ø50			Ø80		
Cliche size	80*150			120*220		
Max. Printing Speed	2,400 ~ 3,200pcs/hour			3,000pcs/hour		
Dryer System	Hot Air conveyor			UV / Hot Air conveyor		
Power Supply	220V/380V, 50/60 Hz, 3P, 6Kw			220V/380V, 50/60 Hz, 3P, 20Kw		
Compressed Air	200Liter/minute, 6 bar			200Liter/minute, 6 bar		
Main Machine Size	1800*1900*2100	1800*1900*2100	2000*2200*2100	2400*2500*2100	2400*2500*2100	2450*2500*2100
Main Machine Weight	2150kgs	2350kgs	2500kgs	3200kgs	3400kgs	3500kgs
Hopper Size	1000*1500*1800					
Hopper Weight	250kgs					
Unloading Conveyor Size	1800*50*1400					
Unloading Conveyor Weight	120kgs					

